



PUNJAB POLLUTION CONTROL BOARD
Zonal Office-2, Vatavaran Bhawan, Nabha Road, Patiala - 147001
Website:- www.ppcb.gov.in

Office Dispatch No :

Registered/Speed Post

Date:

Industry Registration ID: R12PTA73369

Application No : 10211170

To,

Sudhir Goyal
Madhav Alloys Pvt Ltd,village Akalgarh,amloh Bhadson Road,near Toll Plaza
Fatehgarhsahib,Fatehgarhsahib-147203

Subject: Grant Varied 'Consent to Operate' u/s 21 of Air (Prevention & Control of Pollution) Act, 1981 for discharge of emissions arising out of premises.

With reference to your application for obtaining Varied 'Consent to Operate' u/s 21 of Air (Prevention & Control of Pollution) Act, 1981, you are hereby, authorized to operate an industrial unit for discharge of the emission(s) arising out of your premises subject to the Terms and Conditions as mentioned in this Certificate.


1. Particulars of Consent to Operate under Air Act, 1981 granted to the industry

Consent to Operate Certificate No.	CTOA/Varied/FGS/2019/10211170
Date of issue :	23/07/2019
Date of expiry :	31/03/2020
Certificate Type :	Varied
Previous CTO No. & Validity :	CTOA/Varied/FGS/2019/9252651 From:11/03/2019 To:30/09/2019

2. Particulars of the Industry

Name & Designation of the Applicant	Sudhir Goyal, (Director)
Address of Industrial premises	Madhav Alloys Pvt. Ltd., Vill. Akalgarh, Amloh Bhadson Road,near Toll Plaza, Amloh,Fatehgarh Sahib-147203
Capital Investment of the Industry	21243.78 lakhs
Category of Industry	Red
Type of Industry	1044-Industry or process involving metal surface treatment or process such as pickling/electroplating/paint stripping/heat treatment using cyanide bath/ phosphating or finishing and anodizing / enamellings/ galvanizing
Scale of the Industry	Large
Office District	Fatehgarh Sahib
Consent Fee Details	Rs.600000/- vide UTR. no. SBIN917086181916 dated 27/3/2017, Rs. 252000/- vide R. No. 25/4709 dated 12/2/19 and Rs.396000/- vide R. No. 70/5235 dated 19/06/19

Raw Materials (Name with Quantity per day)	Sponge Iron @ 110.0 MTD, Alloys @ 9.0 MTD, NACL @ 0.2 MTD, MS Scrap @ 670 MTD & HR Coil(mild steel) @ 120000 MT/year, Zinc @ 1 TPD , HCL @ 4000 Ltr./Day
Products (Name with Quantity per day)	TMT Bars/Wire Rod @ 250000 MT/year, MS Billets @ 300000 MT/year & ERW @ 120000 MT/year OR MS Black Pipe @ 120000 MT/year or Galvanizing of Sheets/Pipe @ 120000 MT/year
By-products, if any, (Name with Quantity per day)	-
Details of the machinery and process	As per details given in application no. 10211170 TMT Unit : Raw Material - Furnace Loading -Melting -Refining High Speed Casting – Rolling Pipe Unit: Raw Material - Slitting- Looping– Forming- Welding- Sizing & Cutting – Galvanizing - BundlingDispatch
Quantity of fuel required (in TPD) and capacity of boilers/ Furnace/Thermo heater etc.	2 no. Induction furnace of capacity 25 T/heat- Electricity Pickling Section (Galvanizing unit)- Electricity Hot water generator - Diesel @ 15 ltr/ hour 2 DG set of capacities 600 KVA (each) - HSD DG set of capacity 200 KVA - HSD
Type of Air Pollution Control Devices to be installed	2 no. Induction furnace of capacity 25 T/heat- Multi Cyclone follow ed by bag house Pickling Section (Galvanizing unit)- Water scrubber Hot water generator - Not required 2 DG set of capacities 600 KVA (each)-Canopy DG set of capacity 200 KVA - Canopy
Stack height provided with each boiler/thermo heater/Furnace etc.	2 no. Induction furnace of capacity 25 T/heat- Stack of height 40 mtr above ground level/ mtr above roof level Pickling Section (Galvanizing unit)- Stack of height 15 mtr above ground level Hot water generator - Stack of height 15 mtr above ground level 2 DG set of capacities 600 KVA - For higher KVA rating stack height H (in meter) shall be worked out according to the formula: $H = h + 0.2 (KVA)^{0.5}$ where h = height of the building in meters where the generator set is installed. DG set of capacity 200 KVA - Stack of height 3.5 mtr above ground level
Sources of emissions and type of pollutants	2 no. Induction furnace of capacity 25 T/heat- SPM Pickling Section (Galvanizing unit)- SPM, Acid Mist Hot water generator - SPM 2 DG set of capacities 600 KVA (each) - SPM, SO _x , NO _x DG set of capacity 200 KVA - SPM, SO _x , NO _x
Standards to be acheived under Air(Prevention & Control of Pollution) Act, 1981	As per emission standards prescribed by PPCB/ MoEF & CC.

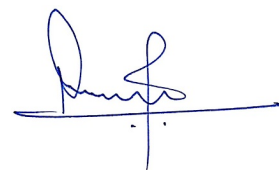

23/07/2019

(Rajeev Gupta)
Environmental Engineer

For & on behalf

of


(Punjab Pollution Control Board)

Endst. No.:

Dated:

A copy of the above is forwarded to the following for information and necessary action please:

Environmental Engineer, Regional Office, Fatehgarh Sahib is requested to carry out re-sampling of air emissions of the industry within one month and thereafter send the analysis report to this office alongwith recommendations.

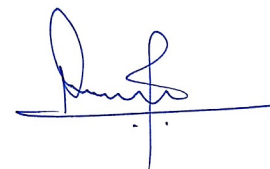


23/07/2019

(Rajeev Gupta)
Environmental Engineer

For & on behalf

of

(Punjab Pollution Control Board)

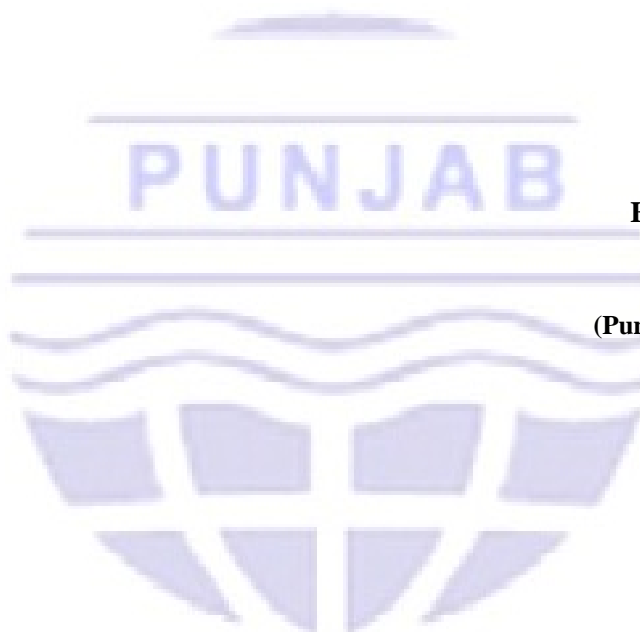

TERMS AND CONDITIONS

A. GENERAL CONDITIONS

1. This consent is not valid for getting power load from the Punjab State Power Corporation Ltd. or for getting loan from the financial institutions.
2. The industry shall apply for renewal /extension of consent at least two months before expiry of the consent.
3. The industry shall not violate any of the norms prescribed under the Air (Prevention & Control of Pollution) Act, 1981, failing which, the consent shall be cancelled / revoked.
4. The achievement of adequacy and efficiency of the air pollution control devices installed shall be the entire responsibility of the industry
5. The authorized fuel being used shall not be changed without the prior written permission of the Board.
6. The industry shall not discharge any fugitive emissions. All gases shall be emitted through a stack of suitable height, as per the norms fixed by the Board from time to time.
7. The industry shall provide port-holes, platforms and/or other necessary facilities as may be required for collecting samples of emissions from any chimney, flue or duct or any other outlets.

Specifications of the port-holes shall be as under:-

- i) The sampling ports shall be provided atleast 8 times chimney diameter downstream and 2 times upstream from the flow disturbance. For a rectangular cross section the equivalent diameter (D_e) shall be calculated from the following equation to determine upstream, downstream distance:-
$$D_e = 2 LW / (L+W)$$

Where L= length in mts. W= Width in mts.
 - ii) The sampling port shall be 7 to 10 cm in diameter
8. The industry shall put display Board indicating environmental data in the prescribed format at the main entrance gate.
 9. The industry shall discharge all gases through a stack of minimum height as specified in the following standards laid down by the Board.

(i) Stack height for boiler plants

S.NO.	Boiler with Steam Generating Capacity	Stack heights
1.	Less than 2 ton/hr.	9 meters or 2.5 times the height of neighboring building which ever is more
2.	More than 2 ton/hr. to 5 ton/hr.	12 meters
3.	More than 5 ton/hr. to 10 ton/hr	15 meters
4.	More than 10 ton/hr. to 15 ton/hr	18 meters
5.	More than 15 ton/hr. to 20 ton/hr	21 meters
6.	More than 20 ton/hr. to 25 ton/hr.	24 meters
7.	More than 25 ton/hr. to 30 ton/hr.	27 meters
8.	More than 30 ton/hr.	30 meters or using the formula $H = 14 Q_g^{0.3}$ or $H = 74 (Q_p)^{0.24}$ Where Q_g = Quantity of SO ₂ in Kg/hr. Q_p = Quantity of particulate matter in Ton/day.

Note : Minimum Stack height in all cases shall be 9.0 mtr. or as calculated from relevant formula whichever is more.

(ii) For industrial furnaces and kilns, the criteria for selection of stack height would be based on fuel used for the corresponding steam generation.

(iii) Stack height for diesel generating sets:

Capacity of diesel generating set	Height of the Stack	
0-50 KVA	Height of the building	+ 1.5 mt
50-100 KVA	-do-	+ 2.0 mt.
100-150 KVA	-do-	+ 2.5 mt.
150-200 KVA	-do-	+ 3.0 mt.
200-250 KVA	-do-	+ 3.5 mt.
250-300 KVA	-do-	+ 3.5 mt.

For higher KVA rating stack height H (in meter) shall be worked out according to the formula:

$$H = h + 0.2 (KVA)^{0.5}$$

where h = height of the building in meters where the generator set is installed.

10. The pollution control devices shall be interlocked with the manufacturing process of the industry to ensure its regular operation.
11. The existing pollution control equipment shall be altered or replaced in accordance with the directions of the Board, and no pollution control equipment or chimney shall be altered or as the case may be erected or re-erected except with the prior approval of the Board.
12. The industry will provide canopy and adequate stack with the D.G sets so as to comply with the provision of notification No GSR-371 E dated 17-5-2002(amended from time to time) issued by MOEF under Environment (Protection) Act, 1986.
13. The Govt. of Punjab, Department of Science, Technology & Environment vide its notification no.4/46/92-3ST/2839 dt. 29/12/1993 has put prohibition on the use of rice husk as fuel after 1.4.1995 except the following:-
In the form of briquettes and use of rice husk in fluidized bed combustion. So the industry shall make the necessary arrangement to comply with the above notification.
14. The industry shall submit balance sheet of every financial year to the concerned Regional Office by 30th June of every year
15. That the industry shall submit a yearly certificate to the effect that no addition / up-gradation/ modification/ modernization has been carried out during the previous year otherwise the industry shall apply for the varied consent.
16.
 - a) The industry shall ensure that at any time the emission do not exceed the prescribed emissions standards laid down by the Board from time to time for such type of industry /emissions.
 - b) The industry shall ensure that the emissions from each stack shall conform to the following emission standards laid down by the Board in respect of the Industrial Boilers.

Steam Generating capacity A.	Required particulate matter B.	
Area upto 5 Km from Other than 'A' class Other than the periphery of I and Class-II town		
Less than 2 ton/hr.	800 mg/NM3	1200 mg/NM3
2 ton to 10 ton/hr.	500 mg/NM3	1000 mg/NM3
Above 10 ton to 15 ton/hr	350 mg/NM3	500 mg/NM3
Above 15 ton/hr	150 mg/NM3	150 mg/NM3

All emissions normalized to 12% carbon dioxide.


17. The industry shall ensure that the Hazardous Wastes generated from the premises are handled as per the provisions of the Hazardous Waste (Management, Handling and Transboundary Movement) Rules, 2008, without any adverse effect on the environment, in any manner.
18. The air pollution control equipments shall be kept at all time in good running condition and;

- (i) All failures of control equipments.
 - (ii) The emissions of any air pollutant into the atmosphere in excess of the standards lay down by the Board occurring or being apprehended to occur due to accident or other unforeseen act or event. 'Shall be intimated through fax to the concerned Regional Office as well as to the Director of Factories, Punjab, Chandigarh as required under rule 10 of the Punjab State Board for the Prevention and Control of Air Pollution Rules, 1983'.
19. The industry shall plant minimum of three suitable varieties of trees at the density of not less than 1000 trees per hectare all along the boundary of the industrial premises.
20. The industry shall submit a site emergency plan approved by the Chief Inspector of Factories, Punjab as applicable.
21. The industry shall comply with the conditions imposed by the SEIAA/MOEF in the Environmental Clearance granted to it as required under EIA notification dated 14/9/06, if applicable.
22. The industry shall make necessary arrangements for the monitoring of stack emissions and shall get its emissions analyzed from lab approved / authorized by the Board:-
- (i) Once in Year for Small Scale Industries.
 - (ii) Twice/thrice/four time in a Year for Large/Medium Scale Industries.
23. The industry shall maintain the following record to the satisfaction of the Board :-
- (i) Log books for running of air pollution control devices or pumps/motors used for it.
 - (ii) Register showing the result of various tests conducted by the industry for monitoring of stack emissions and ambient air.
 - (iii) Register showing the stock of absorbents and other chemicals to be used for scrubbers.
24. The industry will install the separate energy meter for running pollution control devices and shall maintain record with respect to operation of air pollution control device so as to satisfy the Board regarding the regular operation of air pollution control device and monthly reading / record may be sent to the Board by the fifth of the following month.
25. The industry shall provide online monitoring system as applicable, for in stack emission and shall maintain the record of the same for inspection of the Board Officers.
26. The Board reserves the right to revoke the consent granted to the industry at any time, in case the industry is found violating the provisions of Air (Prevention & Control of Pollution) Act, 1981 as amended from time to time.
27. The industry shall comply with any other conditions laid down or directions issued in due course by the Board under the provisions of the Air (Prevention & Control of Pollution) Act, 1981.
28. Nothing in this consent shall be deemed to neither preclude the institution of any legal action nor relieve the applicant from any responsibilities, liabilities or penalties to which the applicant is or may be subjected to under this or any other Act.
29. Any amendments/revisions made by the Board/CPCB/MOEF in the emission/stack height standards shall be applicable to the industry from the date of such amendments/revisions.
30. The industry shall dispose off its solid waste generated by the burning of fuel in an Environmentally Sound Manner within the premises/outside as approved by the Board, to avoid public nuisance and air pollution problem in the area.
31. The industry shall ensure that no air pollution problem or public nuisance is created in the area due to the discharge of emissions from the industry.
32. The industry shall provide adequate arrangement for fighting the accidental leakage/discharge of any air pollutant/gas/ liquids from the vessels, mechanical equipment's etc, which are likely to cause environmental pollution.
33. The industry shall not change or alter the manufacturing process(es) and fuel so as to change the quality/quantity of emissions generated without the prior permission of the Board.
34. The industry shall earmark a land within their premises for disposal of boiler ash in an environmentally sound manner, and / or the industry shall make necessary arrangements for proper disposal of fuel ash in a scientific manner and shall maintain proper record for the same, if applicable.
35. The industry shall obtain and submit Insurance cover under the Public Liability Insurance Act, 1991.
36. The industry shall provide proper and adequate air pollution control arrangements for control emission from its fuel handling area, if applicable.

37. The industry shall comply with the code of practice as notified by the Government/Board for the type of industries where the siting guidelines / Code of Practice have been notified.
38. The industry shall not cause any nuisance/traffic hazard in vicinity of the area
39. The industry shall ensure that the noise & air emission from D.G. sets do not exceed the standards prescribed for D.G. sets by the Ministry of Environment & Forests, New Delhi.
40. The industry shall ensure that there will not be significant visible dust emissions beyond the property line
41. The industry shall provide adequate and appropriate air pollution control devices to contain emissions from handling, transportation and processing of raw material & product of the industry.
42. The Industry shall ensure that its production capacity does not exceed the capacity mentioned in the consent and shall not carry out any expansion without the prior permission / NOC of the Board.

B. SPECIAL CONDITIONS

1. This consent will supersede the earlier consent granted to the industry under the said Act vide no. CTOA/Varied/FGS/2019/9252651 dated 11/03/2019, which is valid upto 30.09.2019.
2. The industry shall ensure that it will not emit the black smoke under any circumstances.
3. The industry shall ensure that the concentration of the suspended particular matter in the flue gas emissions does not exceed 50 mg/Nm³.
4. The industry shall also interlock its Air Pollution Control Device (APCD) with furnace to ensure its regular operation.
5. The industry shall stabilize the movement area in the pipe plant alongwith re-carpeting of movement in rest of the industry within one month.
6. The industry shall get the stack emission carried out from Boards lab within one month and thereafter shall submit the analysis report to the Board within 7 days.
7. The industry shall continue to comply with the standard operating system (SOP) prepared by Punjab State Council for Science & Technology (PSCST), Chandigarh for Air Pollution Control Device.
8. The industry shall be liable to obtain environmental clearance as required under the EIA notification dated 14/9/2006, in case of increase in the production capacity further.
9. The industry shall comply with the conditions of site clearance obtained from SCA-cum-SAC if applicable at this stage.
10. The industry shall appoint dedicated staff for operation/maintenance of APCD/collection system.
11. In case the industry fails to comply with the provisions of the Water (Prevention & Control of Pollution) Act, 1974, Air (Prevention & Control of Pollution) Act, 1981, Environment (Protection) Act, 1986 and/or any other environmental law applicable to the industry and Rules, Circulars & Directions issued by the Board from time to time, then action as deemed fit shall be taken against the industry.

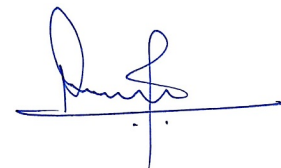

23/07/2019

(Rajeev Gupta)
Environmental Engineer

For & on behalf

of

(Punjab Pollution Control Board)